


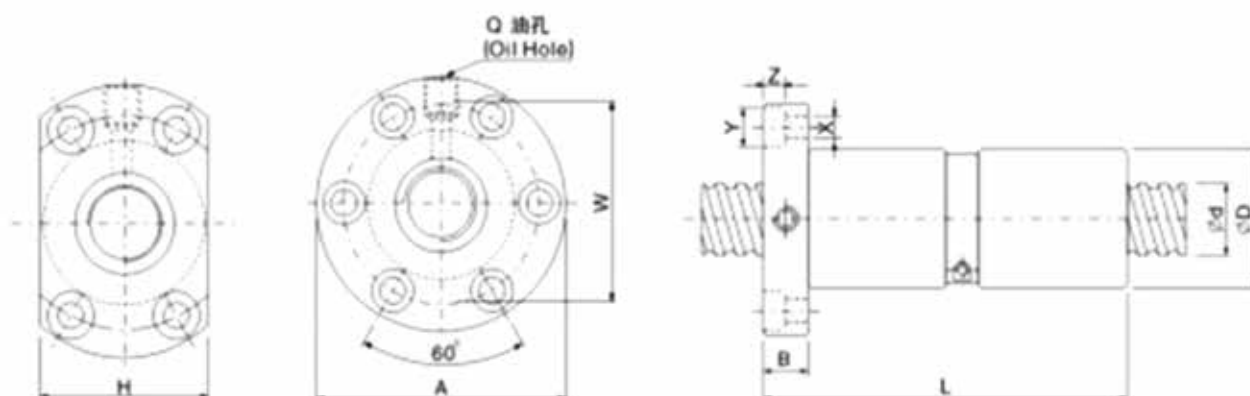


I: 导程 Lead Da: 球径 Ball Dia. n: 珠圈数 Number of Circuits K: 刚性 Stiffness (Kgf/ μ m)
Ca: 动额定负荷 Basic Dynamic Rating Load(Kgf) Coa 静额定负荷 Basic Static Rating Load(Kgf)

单位 (Unit): mm

型号 Model No.	滚珠螺杆、螺母之基准数据 Dimensions																
	d	I	Da	D	A	B	L	W	H	X	Y	Z	Q	n	Ca	Coa	K
★ DFI 1604-4	16	4	2.381	30	49	10	80	39	34	4.5	8	4.5	M6	4	640	1340	35
★ DFI 1605-4		5	3.175	30	49	10	100	39	34	4.5	8	4.5	M6	4	780	1790	36
★ DFI 2004-4	20	4	2.381	34	57	11	80	45	40	5.5	9.5	5.5	M6	4	670	1480	41
★ DFI 2005-4		5	3.175	34	57	11	101	45	40	5.5	9.5	5.5	M6	4	1130	2380	45
★ DFI 2504-4	25	4	2.381	40	63	11	80	51	46	5.5	9.5	5.5	M6	4	760	1950	48
★ DFI 2505-4		5	3.175	40	63	11	101	51	46	5.5	9.5	5.5	M8	4	1280	3110	63
★ DFI 2510-4		10	4.762	46	72	12	145	58	52	6.5	11	6.5	M6	4	1944	3877	65
★ DFI 3204-4	32	4	2.381	46	72	12	80	58	52	6.5	11	6.5	M6	4	860	3050	56
★ DFI 3205-4		5	3.175	46	72	12	102	58	52	6.5	11	6.5	M8	4	1450	4150	72
★ DFI 3210-4		10	6.35	54	88	15	162	70	62	9	14	8.5	M8	4	3390	7170	72
★ DFI 4005-4	40	5	3.175	56	90	15	105	72	64	9	14	8.5	M8	4	1610	5330	98
★ DFI 4010-4		10	6.35	62	104	18	165	82	70	11	17.5	11	M8	4	3910	9520	90
★ DFI 5010-4	50	10	6.35	72	114	18	171	92	82	11	17.5	11	M8	4	4450	12500	117
★ DFI 6310-4	63	10	6.35	85	131	22	182	107	95	14	20	13	M8	4	5070	16600	114
★ DFI 8010-4	80	10	6.35	105	150	22	182	127	115	14	20	13	M8	4	5620	21300	162

备注: 有标注 ★ 记号者可制作左螺紋 Note: with sign ★ can produce left helix

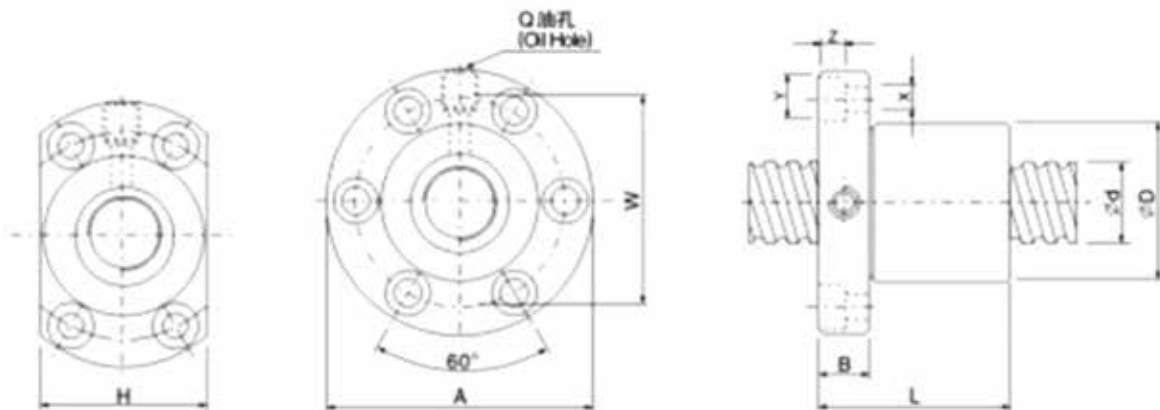

I: 导程 Lead Da: 球径 Ball Dia. n: 球面数 Number of Circuits K: 刚性 Stiffness (Kgf/μm)
Ca: 动额定负荷 Basic Dynamic Rating Load (Kgf) Coa: 静额定负荷 Basic Static Rating Load (Kgf)

单位 (Unit): mm

型号 Model No.		滚珠丝杆、螺母之基准数据 Dimensions																
		d	I	Da	D	A	B	L	W	H	X	Y	Z	Q	n	Ca	Coa	K
★	SFI 1604-4	16	4	2.381	30	49	10	45	39	34	4.5	8	4.5	M6	4	640	1340	16
★	SFI 1605-4		5	3.175	30	49	10	50	39	34	4.5	8	4.5	M6	4	780	1790	20
★	SFI 1610-3		10	3.175	34	58	10	57	45	34	5.5	9.5	5.5	M6	3	833	1249	15
★	SFI 2004-4	20	4	2.381	34	57	11	46	45	40	5.5	9.5	5.5	M6	4	670	1480	25
★	SFI 2005-4		5	3.175	34	57	11	51	45	40	5.5	9.5	5.5	M6	4	1130	2380	25
★	SFI 205T-4		5.08	3.175	34	57	11	51	45	40	5.5	9.5	5.5	M6	4	1130	2380	25
★	SFI 2504-4	25	4	2.381	40	63	11	46	51	46	5.5	9.5	5.5	M6	4	760	1950	31
★	SFI 2505-4		5	3.175	40	63	11	51	51	46	5.5	9.5	5.5	M8	4	1280	3110	35
★	SFI 2510-4		10	4.762	46	72	12	85	58	52	6.5	11	6.5	M6	4	1944	3877	33
★	SFI 3204-4	32	4	2.381	46	72	12	47	58	52	6.5	11	6.5	M6	4	860	3050	40
★	SFI 3205-4		5	3.175	46	72	12	52	58	52	6.5	11	6.5	M8	4	1450	4150	40
	SFI 3210-4		10	6.35	54	88	15	90	70	62	9	14	8.5	M8	4	3390	7170	40
★	SFI 4005-4	40	5	3.175	56	90	15	55	72	64	9	14	8.5	M8	4	1610	5330	49
	SFI 4010-4		10	6.35	62	104	18	93	82	70	11	17.5	11	M8	4	3910	9520	50
	SFI 5010-4	50	10	6.35	72	114	18	93	92	82	11	17.5	11	M8	4	4450	12500	65
	SFI 6310-4	63	10	6.35	85	131	22	98	107	95	14	20	13	M8	4	5070	16600	80
	SFI 8010-4	80	10	6.35	105	150	22	98	127	115	14	20	13	M8	4	5620	21300	90

备注: 有标注 ★ 记号者可制作左螺旋 Note: with sign ★ can produce left helix