
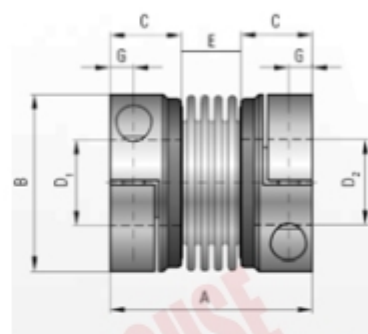


JB2 COUPLINGS

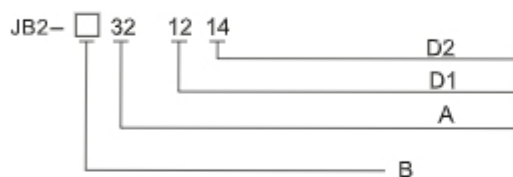

Model No.	D1 D2	B	A	C	G	E	M	(N.m)
JB2 - 16	4 5 6 6. 35 8	16	30	10.5	4.0	9.5	M3	0.7
JB2 - 20	6 6.35 8 9. 525 10 12	20	33	10.5	4.0	12.5	M3	0.7
JB2 - 25	6 6.35 8 9.525 10 12	25	38	12.5	5.0	15	M4	1.7
JB2 - 32	8 9. 525 10 12 14	32	43	14.0	6.0	21	M4	1.7
JB2 - 32L	8 9.525 10 12 14	32	54	14.0	6.0	21	M4	1.7
JB2 - 40	10 11 12 14 15 16	40	62	21.5	6.5	27	M5	4
JB2 - 55	12 14 15 16 19	55	72	23.0	7.0	40	M6	8
JB2 - 65	18 19 20 24 25 28 30 32 35 38	65	81	25.5	9.0	45	M8	15
JB2 - 82	20 24 25 28 30 32 35 38 40 42	82	103	34.5	11.0	56	M10	28

Model No.	(N.m)	(N.m)	(rpm)	(kg*m ²)	(N.m/rad)	(m.m)	(°)	(m.m)	(g)
JB2 - 16	0.8	1.6	18000	3.4 x 10 ⁻⁷	100	0.10	1.5	+0.3 -1.0	8
JB2 - 20	1.5	3.0	13000	8.9 x 10 ⁻⁷	1600	0.10	1.5	+0.3 -1.0	14
JB2 - 25	2.0	4.0	11000	2.8 x 10 ⁻⁶	220	0.15	2.0	+0.5 -1.3	32
JB2 - 32	2.5	5.0	10000	8.8 x 10 ⁻⁶	310	0.20	2.0	+0.5 -1.3	52
JB2 - 32L	2.5	5.0	10000	8.9 x 10 ⁻⁶	310	0.20	2.0	+0.5 -1.3	58
JB2 - 40	10.0	20.0	8000	1.5 x 10 ⁻⁵	520	0.20	2.0	+0.7 -1.5	96
JB2 - 55	25.0	50.0	6000	2.3 x 10 ⁻⁵	850	0.20	2.0	+0.7 -1.5	200
JB2 - 65	60.0	120.0	4500	2.8 x 10 ⁻⁵	960	0.20	2.0	+0.7 -1.5	360
JB2 - 82	80.0	160.0	4000	6.0 x 10 ⁻⁵	1290	0.20	2.0	+0.7 -1.5	750