



PHS ROD END BEARING



POS ROD END BEARING

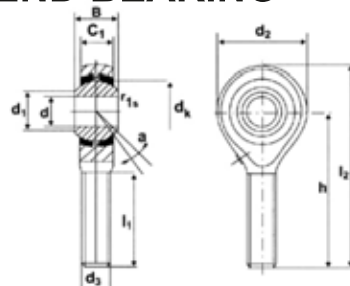

Number	Dimensions (mm)															Load Ratings kN		
	d	d ₃	B	C ₁ max	W	1 ₃ min	d ₂ max	l ₄ max	h ₁	l ₅ max	d ₄ max	d ₅ max	d _K	d ₁	a°	C	C _o	Weight kg
PHS 5	5	M5x0.8	8	6	9	14	18	36	27	4	8.5	11	11.11	7.7	13	3.25	5.70	0.016
PHS 6	6	M 6x1.0	9	6.75	11	14	20	40	30	5	10	13	12.7	9	13	4.30	7.20	0.022
PHS 8	8	M 8x1.25	12	9	14	17	24	48	36	5	12.5	16	15.875	10.4	4	7.20	11.60	0.047
PHS 10	10	M 10x1.5	14	10.5	17	21	26	56	43	6.5	15	19	19.05	12.9	13	10.0	14.5	0.077
PHS 12	12	M 12x1.75	16	12	19	24	30	65	50	6.5	17.5	22	22.225	15.4	13	13.4	17.0	0.10
PHS 14	14	M 14x2.0	19	13.5	22	27	34	74	57	8	20	26	25.4	16.9	16	17.0	24.0	0.16
PHS 16	16	M 16x2.0	21	15	24	33	40	84	64	8	22	28	28.575	19.4	15	21.6	28.5	0.22
PHS 18	18	M 18 X1.5	23	16.5	27	36	44	93	71	10	25	31	31.75	21.9	15	26.0	42.5	0.32
PHS 20	20	M 20 X 1.5	25	18	30	40	48	101	77	10	27.5	35	34.925	24.4	14	31.5	42.5	0.42
PHS 22	22	M 22 X 1.5	28	20	32	43	54	111	84	12	30	38	38.10	25.8	5	38.0	57.0	0.54
PHS 25	25	M 24 X 2	31	22	36	48	60	124	94	12	33.5	42	42.85	29.6	5	47.5	68.0	0.73
PHS 28	25	M 27 X 2	35	24	41	53	66	136	103	14	37	46	47.6	32.3	15	58.0	75.0	0.98
PHS 30	30	M 30 X 2	37	25	46	56	70	145	110	15	40	50	50.8	34.8	17	64.0	88.0	1.1

Number	Dimensions (mm)											Load Ratings kN			
	d	d ₃	B	C _{1 max}	1 _{3 min}	d _{2 max}	h	l _{2 max}	d _k	r _{1s max}	a°	d ₁	C	C _o	Weight kg
POS 5	5	M 5x0.8	8	6	20	18	33	42	11.11	0.3	13	7.7	3.25	5.7	0.013
POS 6	6	M 6x1.0	9	6.75	23	20	36	46	12.7	0.3	13	8.9	4.30	7.2	0.020
POS 8	8	M 8x1.25	12	9	25	24	42	54	15.875	0.3	14	10.3	7.20	11.6	0.030
POS 10	10	M 10x1.5	14	10.5	30	26	48	61	19.05	0.3	13	12.9	10.0	14.5	0.055
POS 12	12	M 12x1.75	16	12	34	30	54	69	22.225	0.3	13	15.4	13.4	17.0	0.085
POS 14	14	M 14x2.0	19	13.5	37	34	60	77	25.4	0.3	16	16.8	17.0	24.0	0.14
POS 16	16	M 16x2.0	21	15	41	40	66	86	28.575	0.3	15	19.3	21.6	28.5	0.21
POS 18	18	M 18 X1.5	23	16.5	45	44	72	94	31.75	0.3	15	21.8	26.0	42.5	0.28
POS 20	20	M 20 X 1.5	25	18	48	48	78	102	34.925	0.3	14	24.3	31.5	52.5	0.38
POS 22	22	M 22 X 1.5	28	20	52	54	84	111	38.10	0.3	15	25.8	38.0	57.0	0.48
POS 25	25	M 24 X 2	31	22	58	60	94	124	42.85	0.3	15	29.5	47.5	68.0	0.64
POS 28	28	M 27 X 2	35	24	63	66	103	136	47.6	0.3	15	33.7	58.0	75.5	0.96
POS 30	30	M 30 X 2	37	25	67	70	110	145	50.8	0.3	17	34.8	64.0	88.0	1.1